

RUN WITH RAM TRAILER



LOWBED GROUP

4 AXLE 70 TON LOWBED SEMI TRAILER



TECHNICAL SPECIFICATION

4 AXLE 70 TON LOWBED SEMI TRAILER

Dimensions and Charges (Compulsory)

Overall width and platform width	3000 mm	Total Payload (capacity)	>= 70 000 kg
Platform length	10000 mm		

Dimensions and Charges (Limited flexibility might be allowed)

Distance between axles	1350 mm	Axle Group Capacity	56 000 kg
Overall length	14050 mm	King Pin Capacity	28 000 kg
Loading platform height	1050 mm	Total GCW (Capacity)	84 000 kg
Fifth wheel height	1400 mm	Empty weight of trailer	13 500 kg
Gooseneck length			

King Pin

3.5½-inch and 2-inch interchangeable fifth wheel king pins compliant with SAE R55.01
Both king pins will be put in toolbox.

Chassis Construction

SERIN chassis suitable for 98/91 EEC standards made from S355 or superior steel with "I" profile shape, produced with atomized submerged arc welding system. The two steel rails will be strongly connected by U-shaped crossbeams.

Platform


The floor of the low profile platform will be made with hard and thick steel and will be covered with hard wood. The platform is equipped with anchor rollers on both sides.

Rear loading Ramp

Two loading ramps, at the rear, removable laterally. Minimum interaxis distance: 1,364mm.min
Adjustment side left and right side it will be do 1860mm max Covered with anti-slip board
Two foldable support legs
Emergency hand pump provided to move the ramps should the hydraulic power plant fail.

Brake system

The brake system is suitable for 71/320 EC and 2002/78 EC standards. It will respect the EU norm ECE R10.03 on electromagnetic emissions.
The brake system includes a parking brake, a safety brake, an automatic setting of play system, an equilibrium control system
The brake system includes an ABS (anti-lock brake system), with 2S/2m captors.
Double compressed air line (yellow and red) connected to the tractor

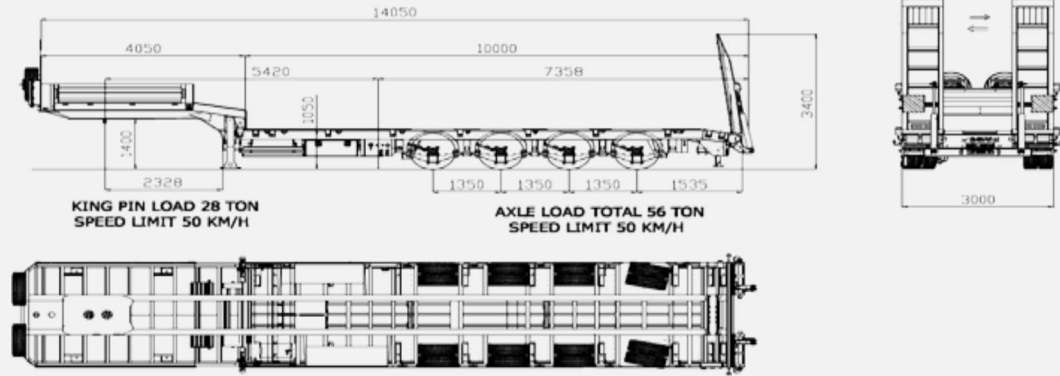

RAM İTHALAT İHRACAT İNŞAAT NAKLİYAT SANAYİ VE TİCARET LİMİTED ŞİRKETİ

Fevzi Çakmak Mahallesi 10753. Sokak KOBİSAN-2 No: 42G Karatay / KONYA

www.ramtreyler.com

info@ramtreyler.com

[ramtreyler](https://www.instagram.com/ramtreyler)

+90 552 642 12 84

+255 752 914 241

Tanzania Service and Spare Parts Sales Point



RAM TREYLER, reserves the right of making changes in the technical specifications and components without making any prior notice. Some components seen on the photographs and specifications seen here may not be standard features of the vehicles. There may have been some changes after publication of this document. No right can be claimed on a sign or numbers used by seller or buyer to define a product on ordering. Differences in colors are due to printing techniques.



TSEK

